




# 3.0" Cellular Roof Deck

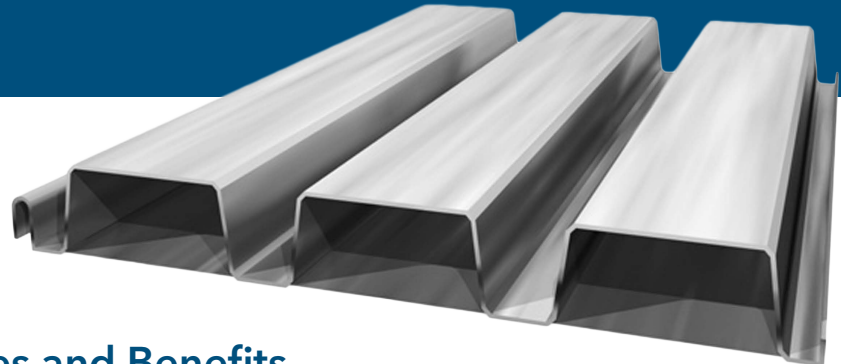

## Cellular Deck brought to you by the Customer Service Leader

Cordeck is a full-service manufacturer and stocking distributor of corrugated steel deck, flashing & trim, and other building construction accessories. Cordeck's mission is to provide excellent customer service. This mission is the foundation for industry wide recognition as service leader for prompt, reliable deliveries, guaranteed quality, and large inventory of gauges and profiles. Cordeck's cellular roof deck provides an ideal solution for long spans, flat acoustical ceilings, canopies, and raceways. You can be certain of the product's total, maximum effectiveness, along with our ability to deliver the industry's highest quality, service, value, and customer satisfaction. Please contact us for further information. At Cordeck, we're devoted to our customers. We stand ready to earn, and keep, your full confidence and trust.

## Features and Benefits

**Long spans** are possible with composite cellular deck because of the strength the bottom plate adds to the deck. Flat ceilings offer an architectural design element offering a smooth, flat appearance.

**Prompt lead times** are our specialty. All orders are promptly produced and shipped to meet your on-site specifications.

**Project management and engineering services** are offered by Cordeck's full, expert, in-house engineering and detailing services to assure optimal planning and design. Our experienced engineers and technicians provide individual customer service and attention to detail from concept to completion.

**AutoCAD® drawings** can be transferred electronically for improved quality and reduced time and cost of drawing transmittal.


**Bundle Placement plans** are provided to ensure correct location of bundles during unloading and hoisting to steel framework.

**SDI Membership** by the manufacturer guarantees product quality in accordance to the Steel Deck Institute (SDI).

**On-spec, guaranteed quality.** Our production staff are true craftsmen, not just interested in getting the job done, but in doing it perfectly.

**Knowledgeable, courteous, caring employees throughout our ranks.** We're a "family business"...no "big corporate" attitude here! We genuinely appreciate our customers' patronage and trust, handling every order, regardless of size, with utmost care and attention.

# 3.0" Cellular Roof Deck

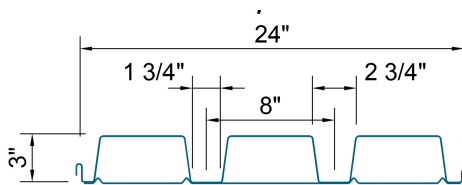

Gage	Design Thickness in	Fy ksi	Sp in <sup>3</sup>	Sn in <sup>3</sup>	Ip in <sup>4</sup>	In in <sup>4</sup>	As in <sup>2</sup>	Wd psf	Rb lb	ΦVn lb
20-20	0.0359 / 0.0359	50	0.588	0.669	1.095	1.114	1.04	3.6	1175	4425
18-20	0.0478 / 0.0359	40	1.042	0.965	1.735	1.507	1.24	4.2	2603	5.910
18-18	0.0478 / 0.0478	40	0.879	0.916	1.691	1.562	1.42	4.8	2603	5910
16-18	0.0598 / 0.0478	40	1.248	1.246	2.076	2.066	1.58	5.4	3884	7430
16-16	0.0598 / 0.0598	40	1.161	1.148	2.136	2.218	1.76	6.0	3884	7430

Number of Spans	Gage	Span - Feet & Inches													
		8'-0"	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"	12'-0"	12'-6"	13'-0"	13'-6"	14'-0"	14'-6"
1	20/20	114	101	90	81	73	66	60	55	49	45	41			
	18/20	177	156	140	125	113	103	93	85	79	72	67	62	58	54
	18/18	175	155	138	124	112	101	89	79	71	64	58	53	48	44
	16/18	251	222	198	178	160	145	133	121	111	103	95	87	79	72
	16/16	234	207	185	166	150	136	121	107	95	86	77	70	64	58
2	20/20	154	145	134	120	109	99	90	83	76	70	65	60	56	52
	18/20	188	167	149	134	121	110	100	92	84	78	72	67	62	58
	18/18	246	218	195	176	159	144	132	121	111	102	95	88	82	76
	16/18	261	232	207	186	168	153	139	128	117	108	100	93	87	81
	16/16	325	289	259	233	211	192	175	160	147	136	126	117	109	102
3	20/20	172	157	140	126	114	103	94	86	79	73	67	62	57	52
	18/20	233	207	185	167	151	137	125	114	105	97	90	83	77	72
	18/18	267	242	216	193	175	158	144	132	121	112	100	91	82	75
	16/18	323	287	257	231	209	190	173	159	146	135	125	116	108	101
	16/16	365	323	289	259	234	212	193	177	162	150	137	124	112	102

Panel Profile	Absorption Coefficient							Glass Fiber Roof Insulation
	125 HZ	250 HZ	500 HZ	1,000 HZ	2,000 HZ	4,000 HZ	NRC	
3" Cellular-A	0.46	0.64	1.12	0.99	0.76	0.58	0.90	2"

Performance values are based upon test conducted by Riverbank Acoustical Laboratories.

Acoustical tests conducted by Riverbank Acoustical Laboratories for the Steel Deck Institute with 3" EPS Plaza Deck Foam

Roof Insulation found the NRC values to be .65 for 1-1/2" WR Deck and .70 for 3" DR Deck.

## Product Information Design

- Cordeck certifies that our 3" Cellular Roof Deck has been evaluated in accordance with the applicable SDI Standards and property values for the Uniform Load Tables, and meets or exceeds SDI requirements.
- Load shown in tables is uniformly distributed total (dead plus live) load in psf (kPa). Loads in shaded areas are governed by live load deflection not in excess of L/240, the dead load included in 10 psf (0.478.kPa). All loads are governed by the allowable flexural stress limit of 20 ksi (140 Mpa) maximum yield steel. Where heavy construction loads or other unusual concentrated loads are anticipated during the lifetime of the deck, the specified live load must be increased to offset the effects of the abnormal concentrated load. See Maximum Spans for Construction and Maintenance Loads in the SDI Design Manual.
- The rib width limitations shown are taken at the theoretical intersection points of the flange and web projections. Depending on the radius used, the load table could vary from that shown.
- Span length assumes center to center spacing of supports. Tabulated loads shall not be increased by assuming clear span dimensions.
- The sectional properties for Cordeck 3" Cellular Roof Deck have been evaluated with the latest edition of the American Iron and Steel Institute (AISI) Specification for the Design of Cold-Formed Steel Structural Members.

# 3.0" Cellular Roof Deck

6. Bending moment formulas used for flexural stress and deflection limitations in accordance with SDI are:

Design	Moment	Deflection
One Span	$M = fS = \frac{w \cdot L^2}{8} - 12$	$D_{max} = \frac{0.0130 \cdot w \cdot L^4 - 172}{EI}$
Two Span	$M = fS = \frac{w \cdot L^2}{8} - 12$	$D_{max} = \frac{0.0054 \cdot w \cdot L^4 - 1728}{EI}$
Three Span	$M = fS = \frac{w \cdot L^2}{10} - 12$	$D_{max} = \frac{0.0069 \cdot w \cdot L^4 - 1728}{EI}$

W = psf (kPa) L = ft. (MPa) E = 29.5 x 10<sup>6</sup> psi (210,000 MPa) I = in<sup>4</sup>/ft. (mm<sup>4</sup>/m)

7. Cordeck guarantees that our 3" Cellular Roof Deck conforms to the Roof Deck Specifications of the Steel Deck Institute and the dimensional parameters established for the load table.

## Material

### 1. Certification

- Steel roof deck will be 3" Cellular Roof Deck as manufactured by Cordeck from steel conforming to ASTM A653 for galvanized deck or ASTM A1008-00 Grade 33 for cold rolled prime painted steel.

### 2. Prime Painted

- Roof deck shall receive one coat of standard gray primer paint over cleaned and pretreated steel.
- The primer coat is intended to protect the steel for only a reasonably short period of exposure, in normal atmospheric conditions, and shall be considered an impermanent and provisional coating.
- Field painting of prime painted material is recommended especially where the deck is exposed.

### 3. Galvanized

- All steel shall be coated to conform to ASTM A924 G-60 or G-90 or to Federal Specification QQ-S-775.
- Galvanized finish in G-60 or G-90 coating is desirable in high moisture atmospheric conditions.
- Cordeck shall not be responsible for the cleaning of the underside of steel deck to ensure bond of fireproofing. Adherence of fireproofing material is dependent on many variables. The adhesion ability of fireproofing materials is the responsibility of the fireproofing applicator.

### 4. Accessories

- Cordeck can supply ridge and valley plates, cant strips, finish strips, sump pans, end and side closures, pour stops, deck plate, rubber cell closures, screws, and other accessories needed to complete the project.

## SDI Member

- All steel deck material is manufactured by SDI members or manufactured in accordance to SDI.
- Cordeck certifies that all material will be in accordance with the SDI Cellular Deck Manual specifications.
- Cordeck 3" Cellular Roof Deck conforms to all applicable SDI Cellular Deck Manual Specifications.

## Installation

- Cordeck Steel Roof Deck shall be installed by qualified and experienced workers.
- Roof deck installation drawings shall be submitted to the project architect and engineer for approval prior to the manufacture of materials.
- Steel roof deck shall be placed in accordance with approved erection drawings.
- End laps shall be a nominal 2" and positioned over supports.
- Position each deck unit on a supporting structural frame. Adjust to final position with accurately aligned side laps and ends bearing on supporting members. On joist framing, be sure the appropriate end laps occur over a top chord angle for proper anchorage.
- When one row is placed end to end, begin another, making alignment adjustment if necessary.
- Each deck unit shall be placed on supporting steel framework and adjusted to final positions before permanently fastened. Do not use unfastened deck as a working platform or storage area.
- Cutting of openings through the deck and all skew cutting shall be performed in the field. Openings not shown on the erection drawings such as those required for stack, conduits, plumbing, vents, etc., shall be cut, and reinforced if necessary, in accordance with SDI.

# 3.0" Cellular Roof Deck

## Attachment


1. Roof deck sheets shall be attached as soon as possible after placement. All sheets placed shall be attached prior to the end of each work day. Arc welding is the most commonly used method for attaching Cordeck Steel Roof Deck to structural supports. Welder shall immediately follow the placement crew.
2. All welds are to be made from the top of the deck down through the bottom flange of the ribs. Welds shall penetrate and attach all thicknesses of material to the structural supports.
3. Caution shall be exercised on the selection of the electrodes to provide positive attachment and to prevent high amperage blow holes.
4. Puddle welds shall be at least 5/8" diameter or elongated puddle welds with an equal perimeter. Fillet welds, when used, shall be at least 1" long.
  - a. 3" Cellular Roof Deck ends shall be welded to structural supports at 12" on center maximum and 18" on center maximum at intermediate supports or as indicated on erection drawings.
  - b. Various mechanical fastening systems other than welding are recognized as viable anchoring methods provided they are reviewed, approved, or specified by the project designer. These include but are not limited to power-activated or pneumatically driven fasteners and screws.
  - c. When spans exceed 5'-0", side laps shall be fastened together at a maximum spacing of 36 inches on center or as indicated on erection drawings.

Attachment must be determined by the designer as part of the overall building design process. Values given in this document are adequate in most cases.

## Storage and Handling

1. Protect steel deck from corrosion, deformation, and other damage during storage, handling, and installation.
2. Deck not promptly erected shall be stored off the ground, with one end elevated to provide drainage. Bundles must be protected against condensation with a ventilated waterproof covering. Deck should always be protected from snow and salt.
3. Bundles must be stacked so there is no danger of shifting or material damage. Bundles must be checked for tightness, and retightened as necessary.
4. Deck bundles on the building frame must always be placed near a main supporting beam, at a column, or a wall. In no situation are the bundles to be placed on unbolted frames or on unattached and unbridged joists. The structural frame must be properly braced to receive the bundles.

"Whatever it takes"



Toll Free: 877.857.6400  
Ph: 262.857.3000  
Fx: 844.857.3533  
[www.cordeck.com](http://www.cordeck.com)

