

FloorPort[™] Series Service Fittings

Redesigned Service Fittings Supply the Versatile Workstation








Wiremold

The newly redesigned FloorPort Service Fittings for Resource RFB® Series Floor Boxes, Walkercell®* Cellular Raceway, and Walkerdeck* Systems provide flexibility in recessed and furniture feed applications. The enhanced design also increases the ease of use and color options while continuing to exceed UL scrub water requirements.

These covers are ideal for use in a wide variety of applications including educational facilities, airports, and commercial and institutional office buildings. The covers are UL Listed to U.S. and Canadian safety standards and are fire classified for use on Walkerdeck* Systems and Cellular Decking Systems in accordance with Floor-Ceiling Design Numbers D739, D832, and D858. Consult the factory for specific fire classified designs.

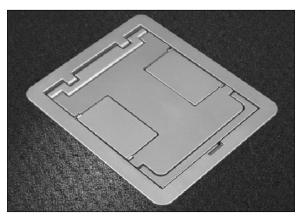

FloorPort Activation Covers for power, communication, and A/V.

FEATURES & BENEFITS

Full sized self-closing recessed handle. New handle design provides ease of opening yet remains out of the way when cover is closed.

Newly redesigned hinge and latch with enhanced durability. Hinge enables covers to open a full 180 degrees to lie flat on the floor for easy access to all compartments.

Flanged and flangeless styles. Flanged version is used on carpeted floors to prevent fraying of carpet. Flangeless covers are used in tile applications where the cover will be exposed to heavy loads, offering the right style for the right application.

Furniture feed options. Available with 1" trade size screw plug and one combination 1 ¼" and 2" trade size screw plug. Provides large capacity for feeding both power and communication cabling.

Versatile application for use on both RFB Floorboxes and WalkerCell®* Cellular Raceway Systems. Accommodates areas requiring both high and low concentration of floor outlets, so designers can attain a coordinated look.

All metal construction. All components are die-cast aluminum to provide high durability and load capacity.

Two large egress openings. In addition to accommodating additional space required for cable egress, positive stops on egress blocks in open (up) position provide added protection to cables.

Expanded color options. Now available in durable powder coat painted nickel, bronze, brass, grey, and black, as well as a brushed aluminum finish which provides more aesthetic alternatives.

TopGuard Protection. An integral design which keeps out water, dirt, and debris from both the power and communication compartments eliminates the need to install additional gasketing.

Datacom connectivity options. Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.




FloorPort[™] Series Cover Assemblies feature a full 180° opening cover with a new recessed handle for easier opening and new cable egress openings that protect cabling while holding them securely in place.





For latest specs visit www.cordeck.com

FLOORPORT PART NUMBER CONFIGURATOR					
<u>FP</u>	<u>B</u>		<u>TC</u>	<u>_NK_</u>	
FloorPort	Blank Top	В	Tile (Flangeless) T	Nickel	NK
Cover	Cutout Top	С	Tile/Carpet TC	Brass	BS
	Furniture Feed	FF	(Flanged)	Black	BK
				Bronze	BZ
				Gray	GY
				Brushed Aluminum	AL

Floo	rPort Series Flanged Cove
Catalog No./Item	Description/Specifications
FPCTCBK FPCTCBS FPCTCNK FPCTCAL FPCTCGY	Cutout Cover Assembly – Flanged cover for use in tile or carpet installation. Die-cast aluminum assembly available in black (BK), bronze (BZ), brass (BS),nickel (NK), gray (GY), or brushedaluminum (AL). Insert in lid allows for carpet or tile cutouts to match finished floor.
FPBTCBK FPBTCBZ FPBTCBS FPBTCNK FPBTCAL FPBTCGY	Blank Cover Assembly – Flanged cover for use in tile or carpet installation. Die-cast aluminum assembly available in black (BK), bronze (BZ) brass (BS) nickel (NK), gray (GY), or brushed aluminum (AL). Lid area is flush with the finished floor, no cutouts provided.

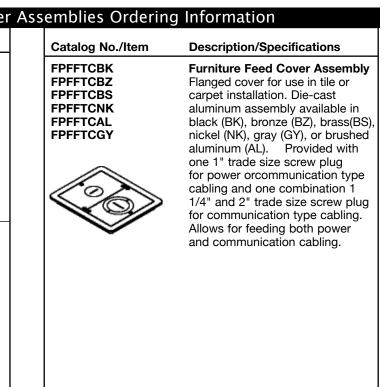

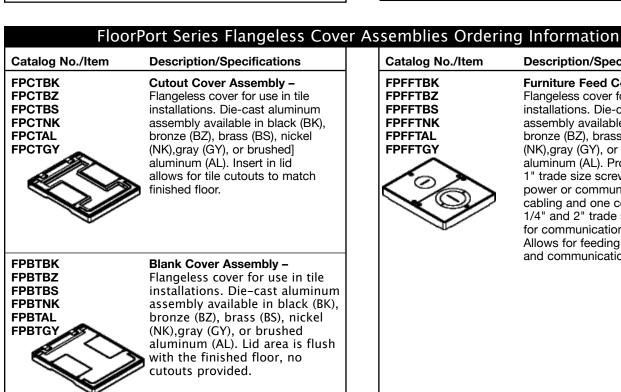

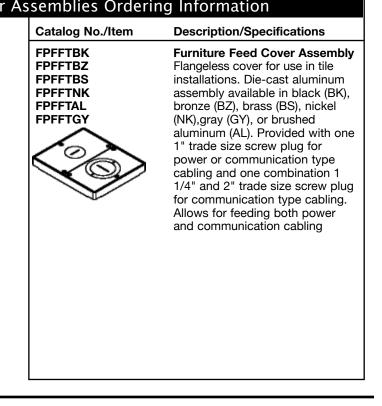

FloorPort Series Cover Assemblies Part Number Conversion Information

FloorPort Flanged Covers			
OLD FLOORPORT PART NUMBER	DESCRIPTION	NEW FLOORPORT PART NUMBER	
S38BBTCAL S38BBTCBS	Blank Top, for Tile or Carpet, Aluminum Blank Top, for Tile or Carpet, Brass	FPBTCAL FPBTCBS	
S38BBTCBK	Blank Top, for Tile or Carpet, Black Blank Top, for Tile or Carpet, Nickel Blank Top, for Tile or Carpet, Bronze Blank Top, for Tile or Carpet, Gray	FPBTCBK FPBTCNK FPBTCBZ FPBTCGY	
S38CCTCAL S38CCTCBS S38CCTCBK	Cutout Top, for Tile or Carpet, Aluminum Cutout Top, for Tile or Carpet, Brass Cutout Top, for Tile or Carpet, Black Cutout Top, for Tile or Carpet, Nickel Cutout Top, for Tile or Carpet, Bronze Cutout Top, for Tile or Carpet, Gray	FPCTCAL FPCTCBS FPCTCBK FPCTCNK FPCTCBZ FPCTCGY	
S38PPTCAL S38PPTCBS S38PPTCBK	Furniture Feed, for Tile or Carpet, Aluminum Furniture Feed, for Tile or Carpet, Brass Furniture Feed, for Tile or Carpet, Black Furniture Feed, for Tile or Carpet, Nickel	FPFFTCAL FPFFTCBS FPFFTCBK FPFFTCNK	

FloorPort Flangeless Covers			
OLD FLOORPORT PART NUMBER	DESCRIPTION	NEW FLOORPORT PART NUMBER	
S39BBTCAL	Blank Top, for Tile only, Aluminum	FPBTAL	
S39BBTCBS	Blank Top, for Tile only, Brass	FPBTBS	
S39BBTCBK	Blank Top, for Tile only, Black	FPBTBK	
	Blank Top, for Tile only, Nickel	FPBTNK	
	Blank Top, for Tile only, Bronze	FPBTBZ	
	Blank Top, for Tile only, Gray	FPBTGY	
S39CCTCAL	Cutout Top, for Tile only, Aluminum	FPCTAL	
S39CCTCBS	Cutout Top, for Tile only, Brass	FPCTBS	•
S39CCTCBK	Cutout Top, for Tile only, Black	FPCTBK	
	Cutout Top, for Tile only, Nickel	FPCTNK	
	Cutout Top, for Tile only, Bronze	FPCTBZ	
	Cutout Top, for Tile only, Gray	FPCTGY	•
S39PPTCAL	Furniture Feed, for Tile only, Aluminum	FPFFTAL	
S39PPTCBS	Furniture Feed, for Tile only, Brass	FPFFTBS	
S39PPTCBK	Furniture Feed, for Tile only, Black	FPFFTBK	
	Furniture Feed, for Tile only, Nickel	FPFFTNK	
	Furniture Feed, for Tile only, Bronze	FPFFTBZ	
	Furniture Feed, for Tile only, Gray	FPFFTGY	

LOAD CAPACITIES FOR FLOORPORT COVER ASSEMBLIES				
CATALOG NUMBERS	MAXIMUM LOAD IN POUNDS	FORMER CATALOG NO.		
FPCTC	1000	S38CCTC		
FPBT	750	S38BBTC		
FPFFTC	1000	S38PPTC		
FPCT	1000	S39CCTC		
FPBT	750	S39BBTC		
FPFFT	1000	S39PPTC		

NOTE: Load applied through a 2" [51mm] mandrel in center of service fitting. Loads above are static loads only and do not pertain to rolling loads.

FloorPort Series Accessories Ordering information

Catalog No./Item

Description/Specifications

PKKIT



Barrier Kit – Used to separate power and communication wires in partition feed covers. Supplied with base and three extensions to adjust to cover height. Kit should be used on PK Presets (Walkercell, Walkerdeck). Kits are sold separately.

RFBKIT



Barrier Kit – Used to separate power and communication wires in partition feed covers. Supplied with base and three extensions to adjust to cover height. Kit should be used on RFB4 and RFB4-SS Floor Boxes. Kits are sold separately.

RFBCIKIT



Barrier Kit – Used with RFB4-CI Floor Boxes. Kits are sold separately.


S3AXBP



Blanking Plate -

Aluminum top plate with steel support plate and four (4) adjusting screws.

Catalog No./Item



Description/Specifications

Internal Bracket -

Two duplex receptacle brackets, receptacle insulators, power grommets, and bend radius control grommets. Communication brackets ordered separately.

DTB-2-2A



Communication Bracket -

Plastic clips on back of bracket provide cable storage loop. For use with WPACR. Activate 2A jacks snap directly into bracket.

DTB-2-B



Communication Bracket -

Blank bracket for customization in field. For use with WPACR. Wiremold Open System inserts sold separately.

DTB-2-4TKO



Communication Bracket -

Four knockouts for RJ style jacks. For use with WPACR. Wiremold Open System inserts sold separately.


DTB-2-2AB DTB-2-2RT



Communication Bracket -

Bracket for Activate (DTB-2-2AB) or Ortronics® (DTB-2-2RT) devices. Ortronics® and Activate adapters included.

FloorPort Activation Accessories for Use with Walkercell* and Walkerdeck* Systems Catalog No./Item **Description/Specifications** WPACR-1G (Shown) Internal Bracket - Two duplex receptacle brackets, receptacle insulators, power grommets, and bend radius control grommets. For use with recessed activations. Communication brackets ordered separately. See next page. WPACR-2G Internal Bracket - Two 15A, 120V duplex receptacles, Bend Radius Grommet two duplex receptacle brackets, receptacle insulators, power grommets, and bend radius control grommets. For use with recessed activations. Communication brackets ordered separately. See next page. WPACR-3G Internal Bracket - Two 20A, 120V duplex receptacles, two duplex receptacle brackets, receptacle insulators, power grommets, and bend radius control grommets. For use with recessed activations. Communication brackets ordered separately. See next page.

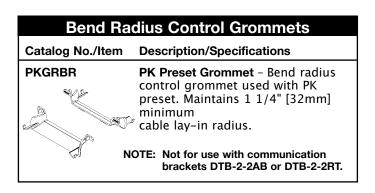

FloorPort Bracket Compatibility

Fittings intended for a cellular raceway system must have a minimum of 2 1/2" [64 mm] of concrete topping over the top of the deck. A typical UL Fire Classified floor activation will consist of the following components:

PK Series Preset Inserts "()" Maximum Quantity of Units Allowed Inside of Preset Insert				
COVER ASSEMBLY	ACTIVATION ASSEMBLY	BARRIER ASSEMBLY	COMMUNICATION BRACKET	
FPBTC FPCTC FPBT FPCT	(1) WPACR	_	(2) DTB-2	
FPFFTC FPFFT		(1) PKKIT	(1) DTB-2FP	